



S3L FO SR HRO

Sizes : 39 → 47




Description

UPPER : Water resistant brown leather
LINING : Breathable lining
TOE-CAP : Extra light fiber glass toe cap
MIDSOLE : Textile anti-perforation Midsole
FOOTBED : Comfortable removable anatomical PU footbed


INNER LAYER SOLE : Comfortable PU inner layer
OUTER SOLE : Heat Resistant and antislip HRO rubber outer sole



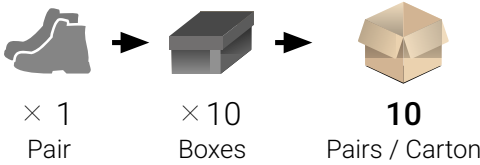





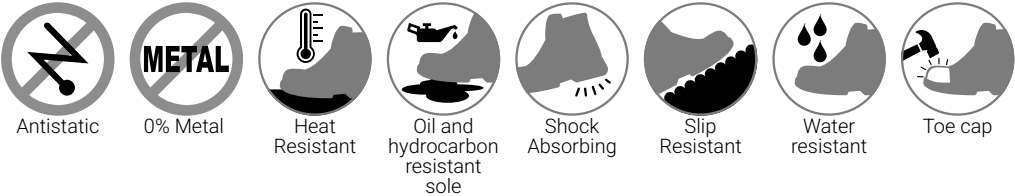









Packing



Features

- Textile anti-perforation insert protects against nails and sharp objects
- Lightweight fiberglass toe cap shields feet from heavy impact
- 100% metal-free
- Malleolus padding in quilted fabric for ankle protection
- Anti-abrasion reinforcements at toe and heel for durability
- PU/rubber outsole resists heat up to 300 °C and provides excellent slip resistance (SR)
- Double-density sole and premium PU insole for superior all-day comfort



SKU/Reference	Size	Carton (L×W×H) m	Carton Weight	EAN13	HS Code	Country of origin
AKIBHC39	39	 0.62 × 0.53 × 0.35	 14.88 kg	7630048224323	64034000	China
AKIBHC40	40	 0.62 × 0.54 × 0.36	 14.95 kg	7630048224330	64034000	China
AKIBHC41	41	 0.62 × 0.54 × 0.35	 15.26 kg	7630048224347	64034000	China
AKIBHC42	42	 0.62 × 0.54 × 0.35	 16.4 kg	7630048224354	64034000	China
AKIBHC43	43	 0.64 × 0.58 × 0.38	 17.03 kg	7630048224361	64034000	China
AKIBHC44	44	 0.63 × 0.57 × 0.38	 17.15 kg	7630048224378	64034000	China
AKIBHC45	45	 0.64 × 0.58 × 0.38	 19.03 kg	7630048224385	64034000	China
AKIBHC46	46	 0.64 × 0.57 × 0.39	 18.58 kg	7630048224392	64034000	China
AKIBHC47	47	 0.64 × 0.58 × 0.38	 19.04 kg	7630048224408	64034000	China

Standards

EN ISO 20345: 2022
S3L FO SR HRO



This product complies with the **European Directive (EU) 2016/425** on Personal Protective Equipment.CE Certificate n° **DK-PPE001545 i01** issued by the **TÜV SÜD DANMARK ApS** (notified body n ° 2443).